



FUEL DISPENSING EQUIPMENT

Total Retail Solution

BEIJING SANKI PETROLEUM TECHNOLOGY CO., LTD
Add:19#,6th Boxing Road, Economic-Technological Development Area,Beijing,P.R.China 100176

business@sankichina.com 0086-10-52310741/730 www.sankichina.com

SANKI Industry Group

0086-10-52310741/730

www.sankichina.com

CONTENTS

01-02	About SANKI	03-04	Group Product Family
05-08	Forecourt Equipment PRIME Fuel Dispenser	09-10	Forecourt Equipment VANTAGE Fuel Dispenser
11-12	Forecourt Equipment CLASSIC Fuel Dispenser	13-14	Forecourt Equipment ATOM Fuel Dispenser
15-16	Forecourt Equipment AdBlue Dispenser	17-18	Forecourt Equipment High Flow Fuel Dispenser
19-20	Forecourt Equipment Gas Dispenser	21-22	Mobile Solution Standby Fuel Station
23-24	Stationary Tank Double Wall Tank	25-26	Tank Auxiliary ATG/Leak Detection/Tank Calibration
27-30	Payment & Automation Server/Cloud Based FMS	31-32	Core Components Pump/Flowmeter/Calculator
33	Depot Equipment Depot Loading/Blending	34-35	SANKI Products Configuration List Product Specification

ABOUT SANKI

SANKI Industrial Group consists of multiple subsidiaries and product brand with 4 modern manufacturing bases and 9 factories all over China, headquartered in Beijing Technology Development Zone. The business not only covers 32 provincial administrative regions and all the biggest oil companies taking the top market share in China, but also grows in more than 50 countries and regions all over the world.

SANKI Industry Group is one of the earliest suppliers in the petroleum retail equipment field and with a core technology team of more than 30 years of experience. SANKI is devoting itself to provide total solutions for petroleum and renewable energy service stations and develop extended business in energy sector to be the full vehicle energy filling solution -“Fuel, gas and electric recharging equipment manufacturer and system integration”.

SANKI Industry Group has a spectrum of products and brands including SANKI Brand Dispenser, Windbell Brand ATG and leak detection system, CSE Brand UL approved SF tank and Container Tank and mobile station solution, Cyboil brand of Kiosk, Fuel management and Fleet management System.

All Brands keep the same Values of Continuous Innovation, Continuous Improvement, Quality and Service, Customers are always the first.

With excellent performance and rich experience, SANKI has been rated as “Excellent supplier for national oil companies” for many years in China. SANKI is growing and becoming a world class company and making more and more global friends and partners grow together.

SANKI Group will uphold the core culture of “Learning, Innovation, Pragmatism and Efficiency” to become a world-class brand.

FUEL
GAS
CHARGING
INTEGRATED
EQUIPMENT
MANUFACTURER



GROUP PRODUCT FAMILY





PRIME SK-52

Features

- Modular designed platform
- H-frame based customized design
- 15 inch touch screen with friendly GUI
- Multiple connectivity (IFSF/CL/RS485)
- Multiple protocols supported
- Latest multimedia applications
- C-Store products promotion
- EMV module supported
- Multiple payment options(IC/Bank card/Mobile Pay)
- Multiple product selections
- 2/4 fueling positions
- 2/4 hoses

Possible Use Scenario



Downtown Station



High Through Put



Latest Technology



Show Case



Customer Attractive



PRIME SK-56

Features

- Modular designed platform
- H-frame based customized design
- 15 inch touch screen with friendly GUI
- Multiple connectivity (IFSF/CL/RS485)
- Multiple protocols supported
- Latest multimedia applications
- C-Store products promotion
- EMV module supported
- Multiple payment options(IC/Bank card/Mobile Pay)
- Multiple product selections
- Multiple fueling positions
- 4/6/8 hoses





PRIME SK-56

Features

- Modular designed platform
- H-frame based customerized design
- 15 inch touch screen with friendly GUI
- Multiple connectivity (IFSF/CL/RS485)
- Multiple protocols supported
- Latest multimedia applications
- C-Store products promotion
- Built-in hose retractor
- EMV module supported
- Multiple payment options(IC/Bank card/Mobile Pay)
- Multiple product selections
- Multiple fueling positions
- 4/6/8 hoses

Possible Use Scenario



Downtown Station



High Through Put



Latest Technology



Show Case



Customer Attractive



PRIME SK-65

Features

- Modular designed platform
- L-frame based customerized design
- 15 inch touch screen with friendly GUI
- Multiple connectivity (IFSF/CL/RS485)
- Multiple protocols supported
- Latest multimedia applications
- C-Store products promotion
- Built-in hose retractor
- EMV module supported
- Multiple payment options(IC/Bank card /Mobile Pay)
- Multiple product selections
- 4/6/8/10/12 hoses
- AdBlue/Super high flow supported
- Ultra scalability with customization








VANTAGE SK-56

Features

- 32 inch touch screen with friendly GUI
- C-Store product promotion
- High technology integration
- Latest multimedia applications
- Convenient self-service
- Facial recognition payment system
- EMV module supported
- Multiple payment options(IC/Bank card/Mobile Pay)
- Voice communication assistant
- Customized features
- 4/6/8 hoses

Possible Use Scenario

-  Downtown Station
-  Show Case
-  High Through Put
-  Customer Attractive
-  Latest Technology



VANTAGE SK-65Pro

Features

- 100 inch Ultra-wide curved screen
- 6 inch TouchScreen PayKit
- C-Store product promotion
- High technology integration
- Latest multimedia applications
- Convenient self-service
- Facial recognition payment system
- Multiple payment options(IC/Bank card/Mobile Pay)
- Voice communication assistant
- Built-in hose retractor
- Customized features
- 4/6/8 hoses





Classic SK-15

Features

- Automatic lubricant blending
- 2 products
- Programmed ratio
- Convenient for motorcycles

Possible Use Scenarios



2 stokes motorcycles



Classic SK-52

Features

- High reliability and durability design
- 1/2 product selections
- 1/2 fueling positions
- High accuracy, OIML/MID certified
- Classic H-Frame design
- 1/2/4 hoses
- Side and Front oriented
- Standard/High/Super High flow rate
- Multiple options and customized features



Classic SK-56

Features

- High reliability and durability design
- Multiple product selections
- Multiple fueling positions
- High accuracy, OIML/MID certified
- Classic H-Frame design
- 4/6/8 hoses
- Standard and High flow rate
- Multiple options and customized features



Classic SK-65

Features

- High reliability and durability design
- Multiple product selections
- High accuracy, OIML/MID certified
- Classic L-Frame design
- 2/4/6/8 hoses
- Standard and High flow rate
- Multiple options and customized features



ATOM SK-10

Features

- EU compact design
- Monolit structure, flexible hose mast
- 1/2 product selections
- 1/2 fueling positions
- High accuracy, OIML/MID certified
- 1/2 hoses
- Standard/High/Super High flow rate
- Satellite support
- Multiple options and customized features
- Convenient installation and maintainance
- Small body, Big wisdom

Possible Use Scenario



Flexible Configuration



Big Truck Solution



Cost Effective



Fleet Management Support



Space Saving



Easy Operation



Features

- Designed for EU6 diesel engine
- Neutralize nitrogen oxidize
- Reduce nitrogen oxidize emissions
- Environmental Protection
- Optional configuration
 - AdBlue standalone
 - AdBlue/Standard flow diesel combination
 - AdBlue/Super High flow diesel combination

Specifications

AdBlue flow rate	35 LPM
Ambient temperature	-40°C~45°C
AdBlue pump Power	220V
AdBlue nozzle	Stainless steel 3/4"
Solenoid valve	Stainless steel 12/24V

PRIME AdBlue

Classic AdBlue

ATOM AdBlue



SK-High Flow

Features

- Ultra High flow rate 120/180/300/500/1000 LPM
- Overshoot prevention
- Accuracy $\pm 0.3\%$ with stability
- Optional IC/ID card function
- Heating option for -40°C working environment

Possible Use Scenario



Locomotives



Ship



Depot Loading



Ultra High Flow

1,000 LPM



Super High Flow

Suction
180 LPM



Super High Flow

Dual Hose
120 LPM





CNG Dispenser

Features

- IC/ID card option
- Two side operated
- Preset and Fill up support
- Accurate flow meter
- Embedded ARM processor with high upgradability
- Enhanced anti-interference and anti-electrostatic
- Supports international standard IFSF protocol.
- Easy integrated with hybrid fuel stations



LNG Dispenser

Features

- IC/ID card option
- Two side operated
- Preset and Fill up support
- Accurate flow meter
- Embedded ARM processor with high upgradability
- Enhanced anti-interference and anti-electrostatic
- Supports international standard IFSF protocol.
- Easy integrated with hybrid fuel stations



Hydrogen Dispenser

Features

- IC/ID card option
- Imported original meters
- Breakaway/Emergency Switch
- Explosion-proof design, safe and stable working
- Auto power-off transaction protection
- Multiple protocols supported



LPG Dispenser

Features

- IC/ID card option
- Single/Dual hose option
- Built in gas separator
- Standard flow rate



SK-AdBlue Skid

AdBlue Mobile Station

Features

- Compact design for easy installation and maintenance
- Supports various AdBlue dispenser options
- Supports internal or external AdBlue dispenser
- Constant temperature function, optional air conditioner
- Equipped with upload pump system



SK-MS

Customized Mini Skid

Features

- Capacity from 1,000 to 15,000 liters
- Automation system with FMS / ATG
- Complete gas station functions
- UL 142 , UL 2085 Listed



SK-FS311

Mobile Fuel Skid 20ft/40ft

Features

- 1/2 product chambers
- 1/2 fuel dispensers
- UL 142 , UL 2085 Listed
- Capacity from 30,000 to 68,000 liters
- Anti-Corrosive Tank
- Empty Fuel Skid can be stacked
- Highly integrated design options
 - ATG
 - Fuel Management System
 - Generator
 - Loading pump
 - Pressure relieving device
 - Overfill prevention system
 - Multiple options and customized features





SF Double Wall Tank

Features

- UL certificated
- Robot welding
- Automatic production line
- Leak detection system option



SINOPEC, CNPC, CNOOC and SINOCHEN





SK-SS200B

ATG Smart Console

Features

- Monitor tank level and other parameters in real time
- 8 inch touch screen with friendly GUI
- Automatic alarm for abnormal conditions
- Support for International Units of Measurement
- Support multiple languages
- Integrated scheduling function
- Automatically generate delivery reports
- Programmable leak detection

Options

- Leak sensor
- SMS report function
- Support GPRS/LAN network and TCP/IP protocol

SK-SP300

ATG Magnetostrictive Probe

Features

- Real-time data transmission
- Measuring fuel level and water level simultaneously
- Five temperature sensors equipped
- Class 0 intrinsic safety
- Digital signal transition, high anti-interruption ability
- Stainless steel (316L) with customizable length
- High precision as 0.5mm and resolution as 0.01mm
- Maximum communication distance 1200m
- IP67 protection grade
- ATEX and GOST approved

SK-Leak Detection

Optic Liquid Leak Sensor

Features

- Compact structure and artistic appearance
- Easy to install and maintain
- Explosion-proof design, safe and reliable
- Connectivity up to 12 sensors
- Support Float switch leak sensor
- Support switch volume leak sensor
- Support RS485 interface leak sensor
- Identify fuel and water leakage
- Leak sensor fault detection
- LED alarm indicators
- Connectivity with host computer
- Support to integrate with Tank Gauging system


SK-TC


Tank Calibration

Features

- Rapid calibration: Completed one tank in 2 hours
- Flowmeter accuracy 0.3%
- Calibration without waiting time
 - During loading work
 - During unloading work

Possible Use Scenarios

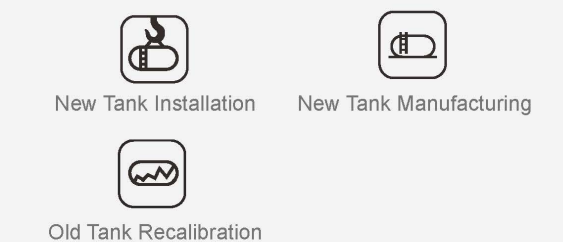

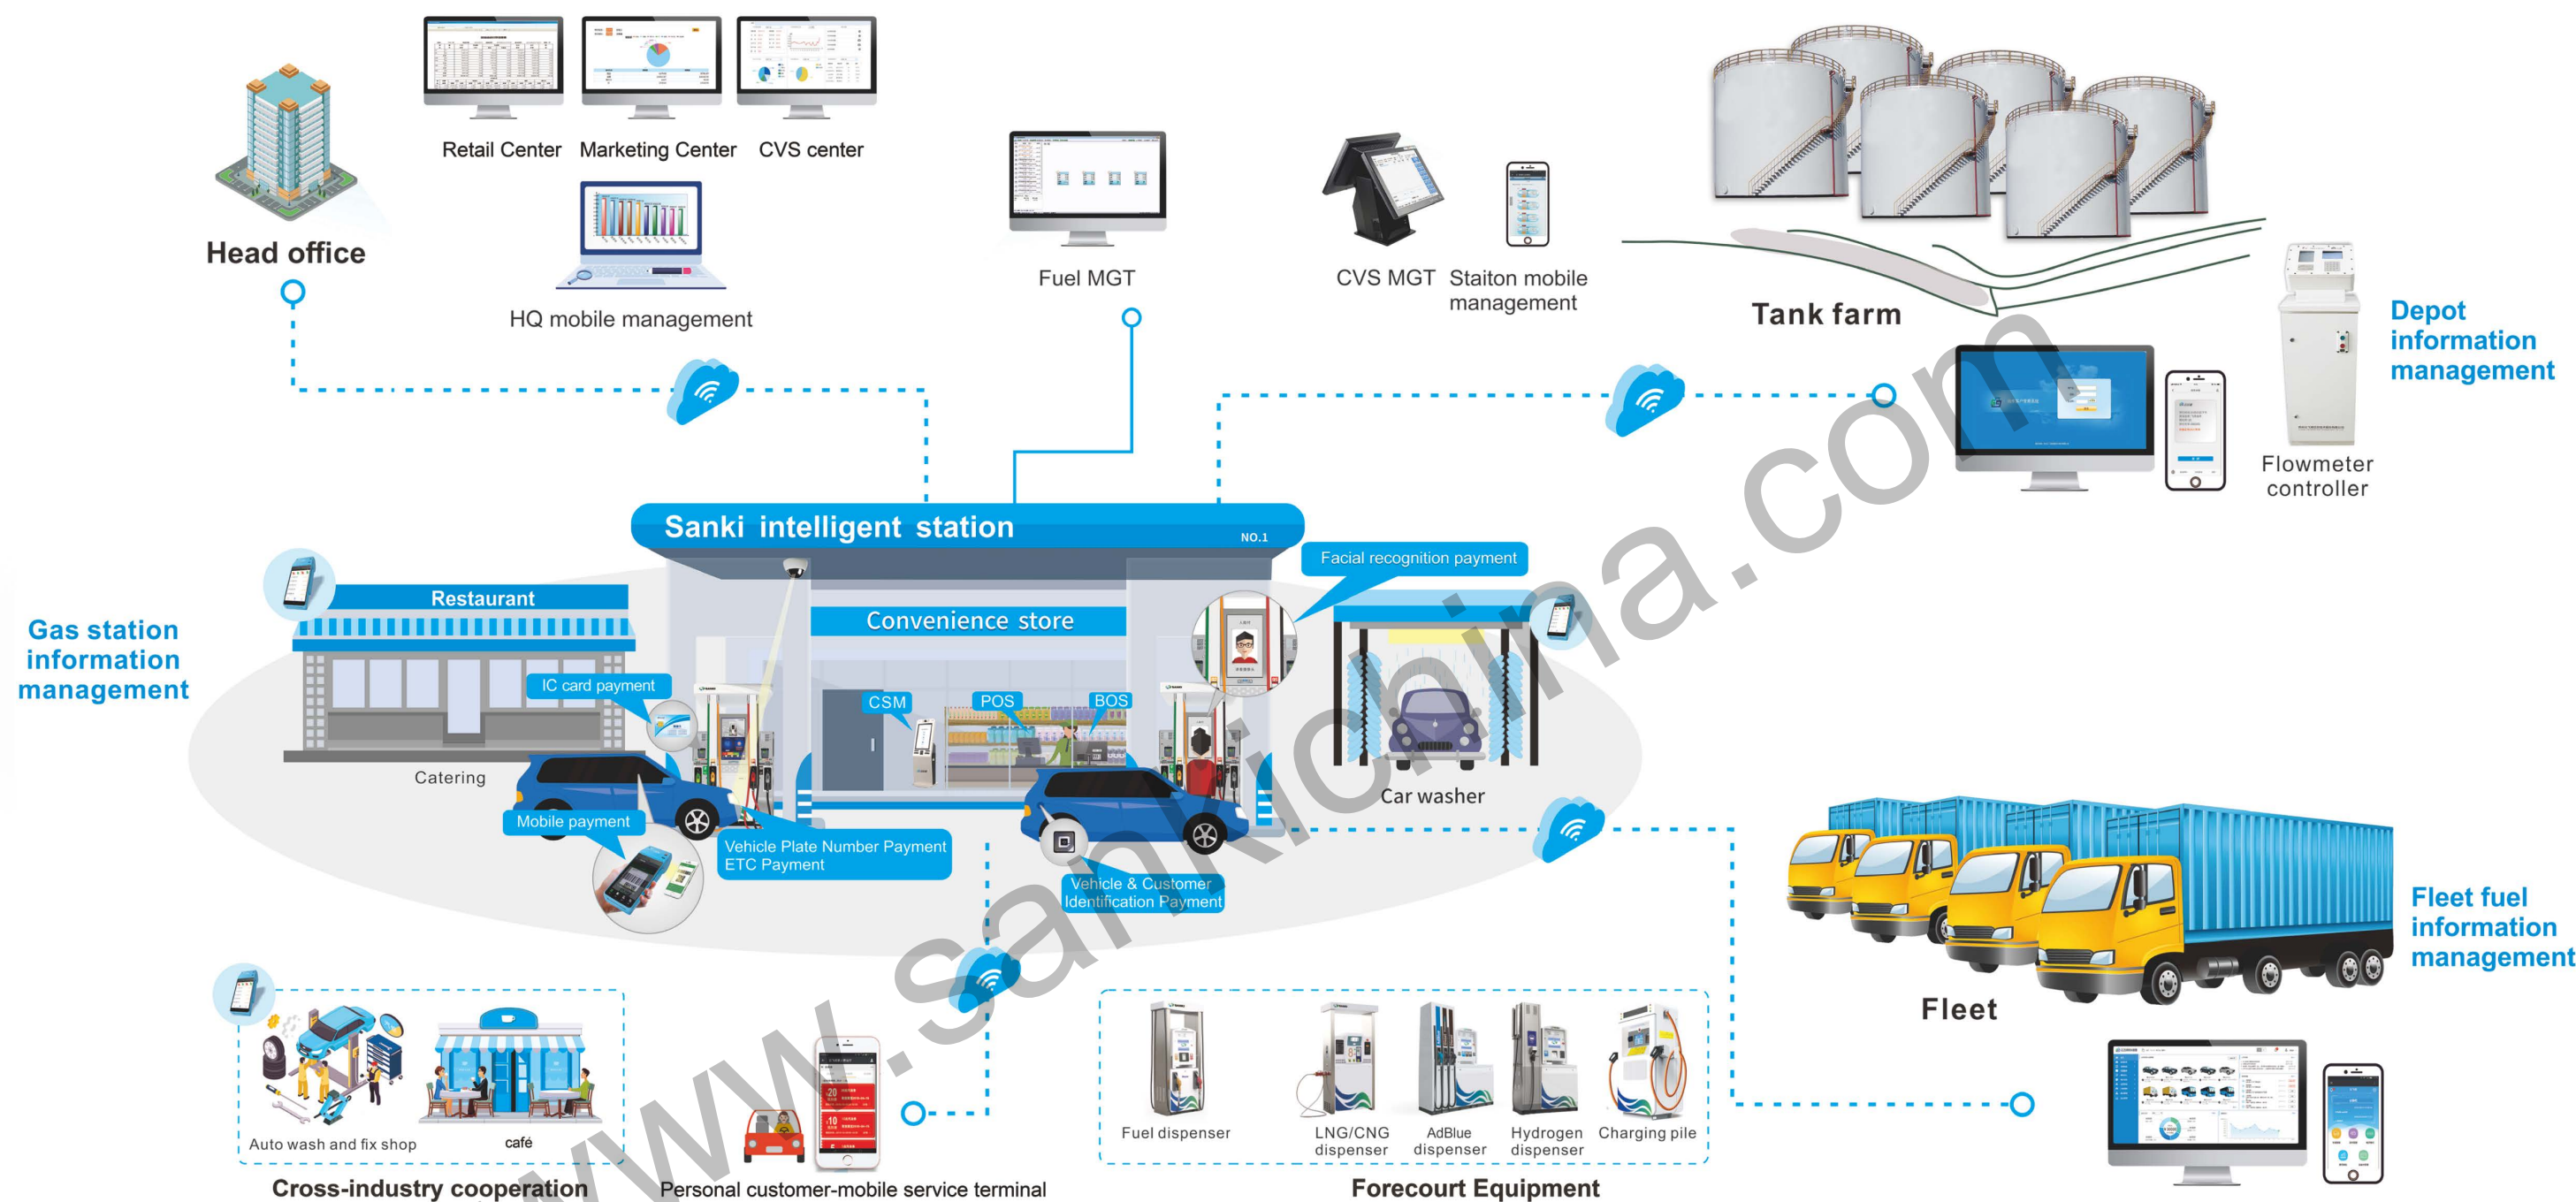

SK-FMS
Server/Cloud Based FMS

- Simple and practical design for convenient operation
- USB interface based communication control unit
- Easy installation and maintenance
- Tank gauge with real-time monitoring
- Automatic collection of shift information

Gas station management

- Pump & Tank real-time status monitoring, tank alarm
- Fueling transaction real-time reception and display
- Real-time total sales accounting for current shift
- Price adjustment
- Shift processing
- Sales details inquiry
- Operator sales statistics inquiry
- Delivery record inquiry

Retail center management

- Delivery management
- Sales management
- Inventory management
- Reports management
- Business analysis
- Sales plan management
- Price adjustment

Customer management

- User card management
- IC card making
- Secret key management
- Fleet customer management
- Reports management
- Inquiry & statistics

IC card online self-service

- Fueling bills self inquiry
- IC card information inquiry
- Suspend card online
- Password self changing



NFC Tap & Pay

- Tap and pay with customer cell phone
- Easy-to-operate handheld POS for attendant
- One handheld POS for multiple dispensers




Card Pay

- Best choice for self-service
- EMV/Member Card supported
- Encrypted and Rapid Transaction Service



QR Code Pay

- Free App for customers
- Membership QR code is your wallet
- Transaction and membership message

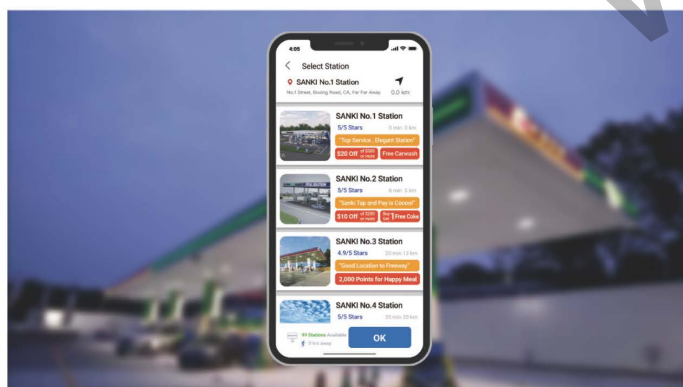

OneStep Pay

- Station services All-in-One
- Services first, payment on departure
- Open to third party payment software



CyberPOS Pro

Features

Simple and Intelligent operation

- Support multiple payment methods to complete the transaction in one operation
- 20-minute learning curve gets new cashiers up and running faster
- Consistent GUI across multiple sites for maximum staffing flexibility
- Smart forecourt integration to quickly alert forecourt issues


Flexible and Diverse Sales systems

- Flexible membership discount options, including discounts by payment type, car wash, and loyalty-based discount
- Integrate with a variety of food service options, from pre-packaged food menus, self-ordering touchscreens and made-to-order options.
- Automatic calculation of the best deal price for an item, independent of the cashier

Smart and secure management.

- The searchable log records the cashier's keystrokes, which can be viewed and printed in the system.
- Cashier Over/Under report shows over/under cashier statistics for all cashiers
- The Remote Manager suite enables you to control, configure and monitor sites from any Internet-enabled device

More partners More possibilities

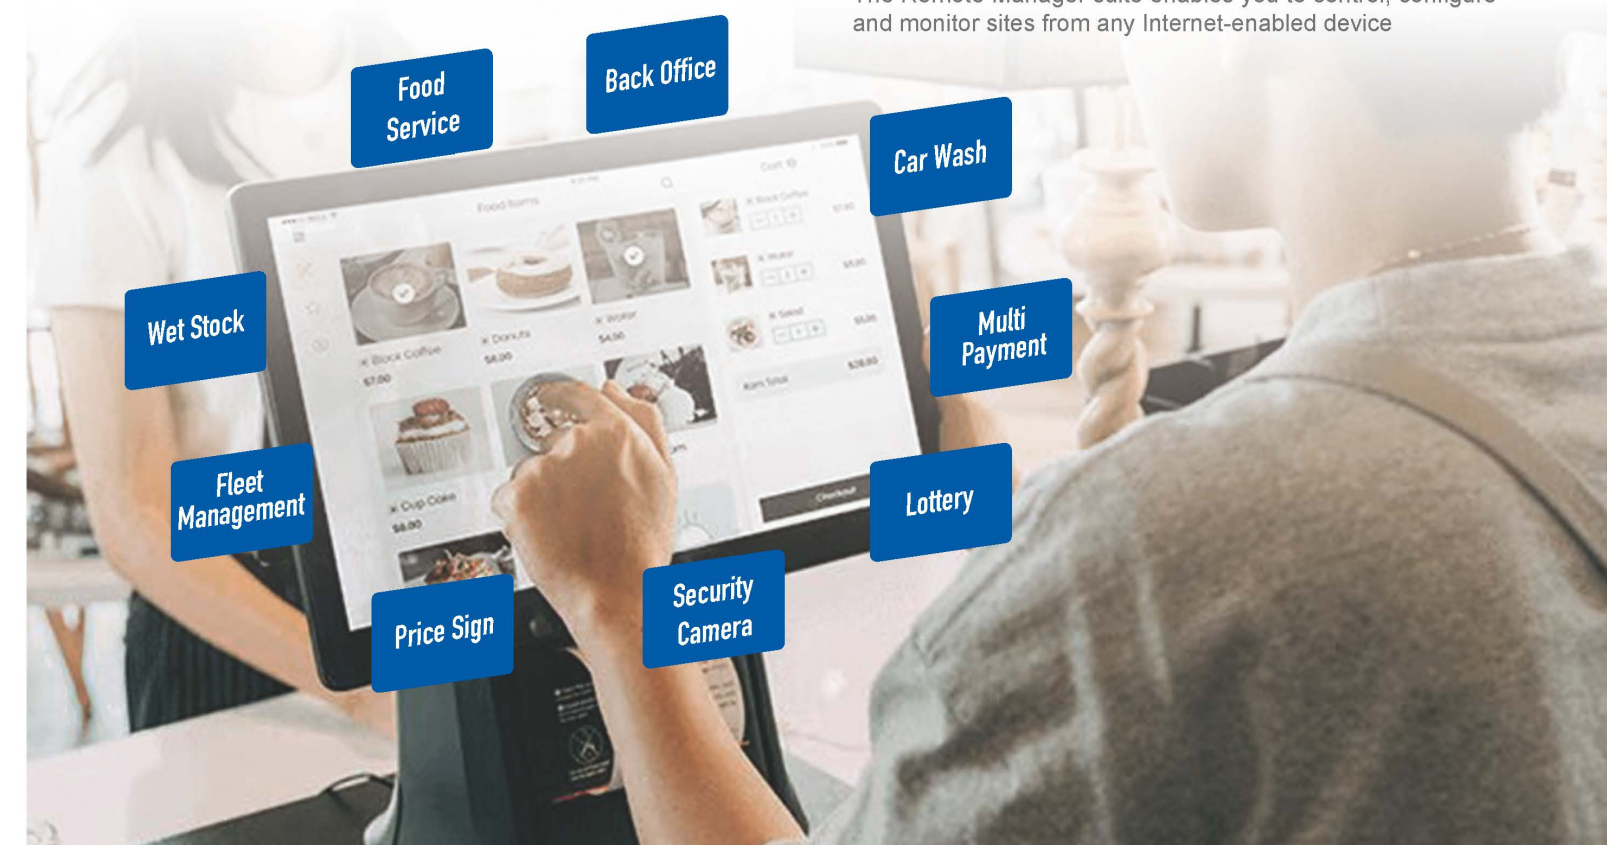




Vapor Recovery Vacuum Pump

Features


- Automatic rotating speed adjustment
- High accuracy Air/Liquid recovery ratio
- Inverter motor equipped
- Compact and isolation structure
- Anti-wear, long lifespan
- Explosion-proof certificate: Ex d II A T3 Gb/Ex C II Gb
- Protection class: IP55
- Ambient temperature: -40°C ~ 50°C
- Ambient pressure: 80kPa ~ 106kPa
- Maximum flow rate: 80LPM
- Maximum vacuum degree: 0.05MPa
- Voltage: 36V DC
- Power: 45W

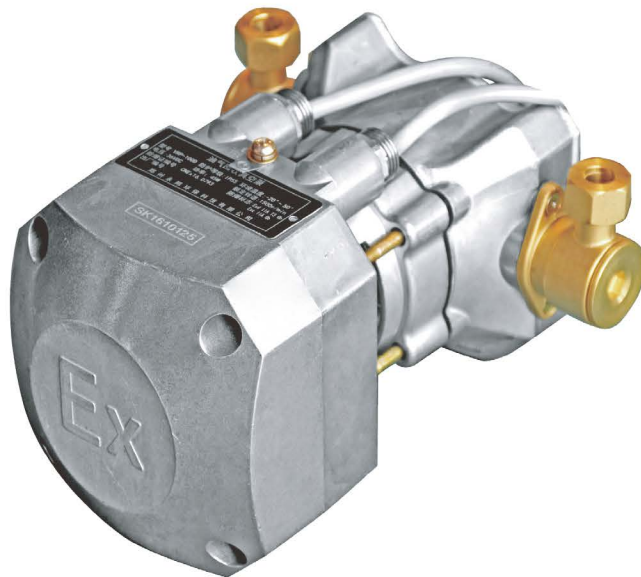

Gear Pump GP-50A

Features


- Two stage filtering system
- Two stage gas /air separation
- Reliable and durable
- 12 million liter life cycle verified
- OIML approval and qualified certificated

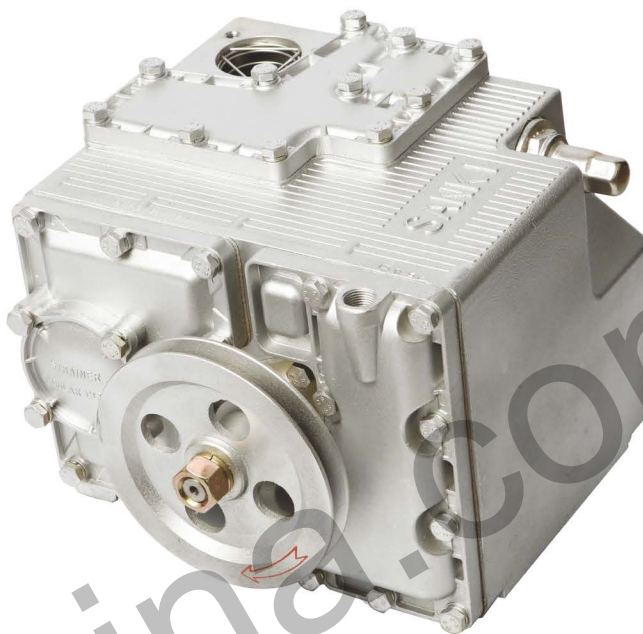

Electronic Calculator

Features


- ARM 32 bit CPU
- Dispenser measuring and IC card payment integrate
- FMEA analysis
- Industry level design
- Big memory
- High speed
- Flexible upgradeability

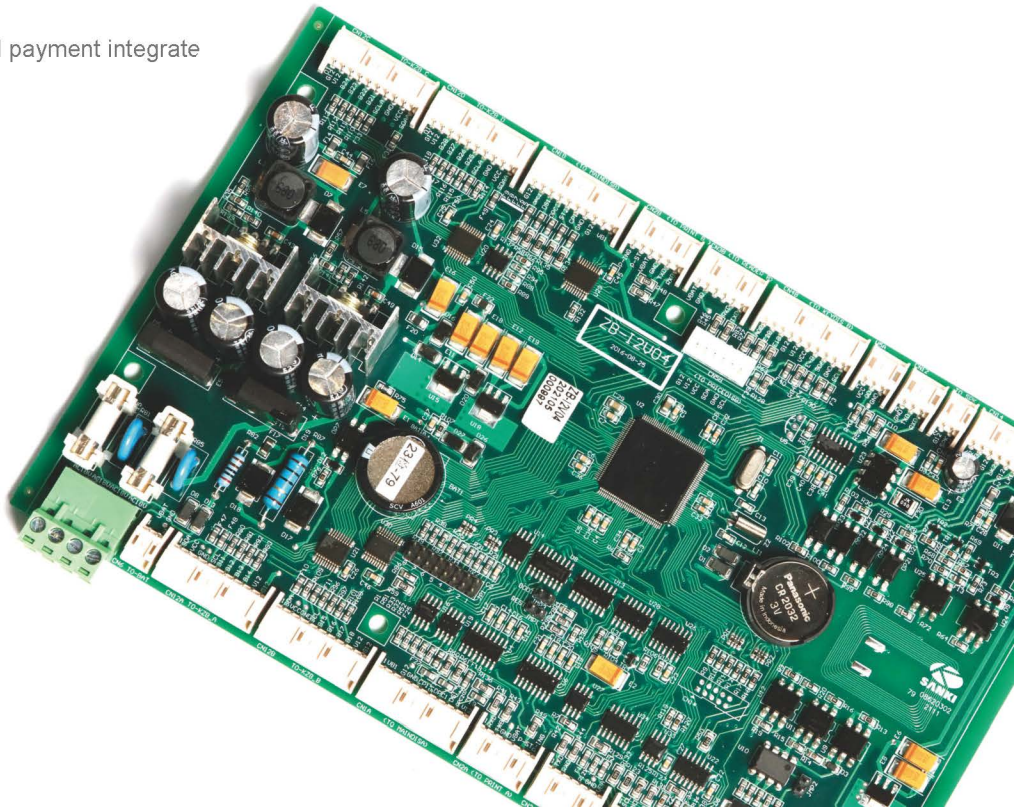

Flow Meter FM-500C

Features

- Top-Inlet and Bottom Outlet Design
- Minimized inside leakage
- Pistons with anti-wearing material
- High Accuracy
- 12 million liters accuracy and life cycle test
- OIML approval and qualified certificated

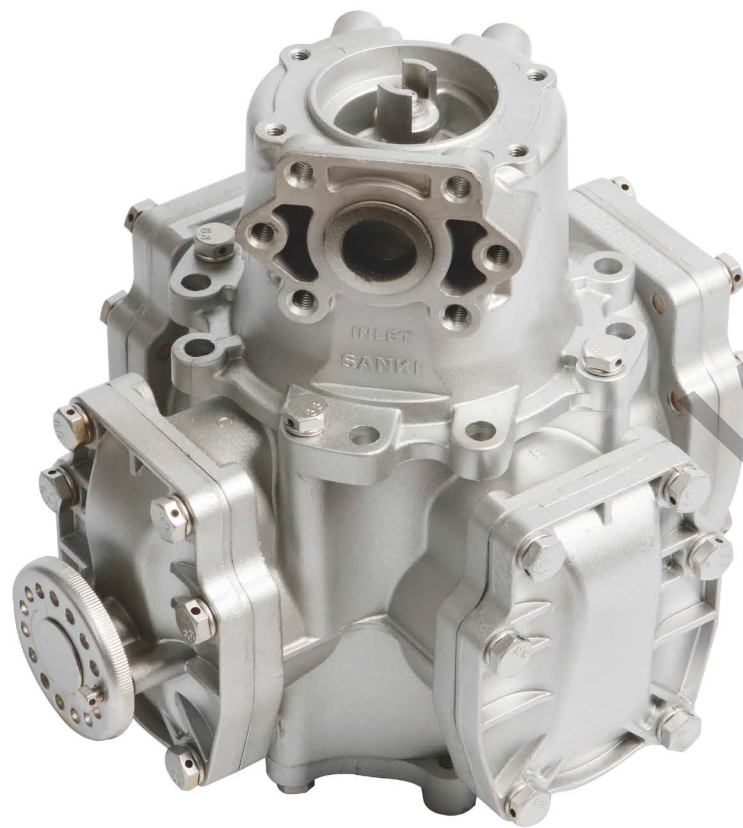

Features

- Depot tanker loading quantitative delivering system
- Unique modular design
- Explosion-proof connector for site installation
- Reliable venting and filtering system
- Intelligent measuring control system
- Anti-static and prevent overflow



SK-AQCS-IIB

Skid-Mounted Depot Blending



SK-AQCS-I

Depot Top Loading



SANKI Products Configuration List



Series		ATOM	Classic	Classic	Classic	Classic	Classic	SPRIME	SPRIME	SPRIME	SPRIME	VANTAGE	VANTAGE
Model	Suction	●	●	●	●	●	○	●	●	●	●	○	○
	Pressure	○	○	○	○	○	●	○	○	○	○	●	●
Products	Quantity	1/2	1/2	1/2	2/3/4	1/2/3/4	1	1/2	2/3/4	2/3/4	2/3/4/5	2/3/4	2/3/4
Extra Product Type	E85	○	○	○	○	○	—	○	○	○	○	○	○
	B20	○	○	○	○	○	—	○	○	○	○	○	○
	AdBlue	○	○	○	○	○	—	○	○	○	○	○	○
	Lubricant	—	●	—	—	—	—	—	—	—	—	—	—
Hose	Numbers	1/2	1/2	1/2/4	4/6/8	2/4/6/8	1/2	2/4	4/6/8	4/6/8	2/4/6/8/10	4/6/8	4/6/8
Flowrate	Standard	●	●	●	●	●	—	●	●	●	●	●	●
	High Flow	○	○	○	○	○	—	○	○	○	○	○	○
	Super High Flow	—	—	—	—	—	●	—	—	—	—	—	—
Hanging Hardware	Splash Guard	○	○	○	○	○	—	○	○	○	○	○	○
	Breakaway	●	○	○	●	●	—	●	●	●	●	●	●
	Swivel	○	○	○	○	○	—	●	●	●	●	●	●
	Hose retractor	—	—	—	—	—	—	—	—	○	○	●	●
	Hose Mast	●	—	—	—	—	—	—	—	—	—	—	—
	Flow Indication	—	●	●	●	—	—	●	●	○	○	○	○
	Front oriented	—	—	○	●	●	—	●	●	●	●	●	●
	Side oriented	●	●	●	—	—	●	—	—	—	—	—	—
Display	765	●	●	●	●	●	●	●	●	●	●	●	●
	995	○	○	○	○	○	○	○	○	○	○	○	○
	Numbers	2/4	2/4	2/4	2/4/6	2	2	2/4	2/4	2/4	2/4	4	—
Power	110V	○	○	○	○	○	○	○	○	○	○	○	○
	220V	●	●	●	●	●	●	●	●	●	●	●	●
Keypad	Metal	○	○	●	●	○	●	●	●	●	●	●	—
	Plastic	○	●	○	○	○	○	○	○	○	○	○	—
Communication	RS485	○	○	○	○	○	○	○	○	○	○	○	○
	Current Loop	●	●	●	●	●	●	●	●	●	●	●	●
	IFSF	○	○	○	○	○	○	○	○	○	○	○	○
Security Transaction	Ecrypted-Display	○	○	○	○	○	○	○	○	○	○	○	○
	Ecryption-Pulser	○	○	○	○	○	○	○	○	○	○	○	○
	E-Lock/Seal	●	●	●	●	●	●	●	●	●	●	●	●
Others	Emergency Stop	●	●	●	●	●	●	●	●	●	●	●	●
	Buildin-Printer	○	—	○	○	○	○	○	○	○	○	○	○
	Heating system	○	○	○	○	○	○	○	○	○	○	○	○
Value adding & Intelligent Parts	Touch screen 15"	—	—	—	—	—	—	○	○	○	○	—	—
	Touch screen 32"	—	—	—	—	—	—	—	—	—	—	●	●
	Vapor recovery	○	—	○	○	○	—	○	○	○	○	○	○
	Voice Intercom	—	—	—	—	—	—	○	○	○	○	○	○
	EMV	—	—	—	—	—	—	○	○	○	○	○	—
	Facial recognition	—	—	—	—	—	—	○	○	○	○	○	○
Dimension	LxWxH (mm)	780x474x1600	920x452x2196	920x452x2196	1250x620x2380	1850x660x1930	1035x545x1494	1050x520x2380	1250x720x2380	1250x720x2382	1996x600x2380	1250x720x2380	1250x720x2380
Package	LxWxH (mm)	880x520x1800	1150x490x2240	1150x490x2240	1392x800x2520	2076x766x2130	1250x590x1800	1250x620x2520	1330x900x2520	1330x900x2520	2076x766x2560	1330x900x2560	1330x900x2520
	40ft FCL Qty	58	48	48	22	16	29	38	21	21	16	21	21

FUEL DISPENSING EQUIPMENT

TOTAL RETAIL SOLUTION



Technical Specifications

Accuracy	±0.25%
Flow rate	50,80,120,180,300,500,1000 LPM
Ambient temperature	-40°C~+55°C or -45°C~+55°C
Relative humidity	20%~95%
Unit noise rate	<70dB(A)
Inlet vacuum rate for suction pump	≥54kPa
Communication	RS 485 portor current loop


Power supply	110V/220V(-15%~+10%);(50/60±1)Hz
Digit of sale	0.00~99999.99
Digit of volume	0.00~9999.99
Digit of unit price	0.00~999.99
Totalizer of sale	0~42949672.95
Totalizer of volume	0~42949672.95

Global Partners Grow Together




BEIJING SANKI PETROLEUM TECHNOLOGY CO., LTD

19# 6th Boxing Road, Economic-Technological Development Area, Beijing, P.R. China 100176

 business@sankichina.com

 0086-10-52310741/730

 www.sankichina.com

