


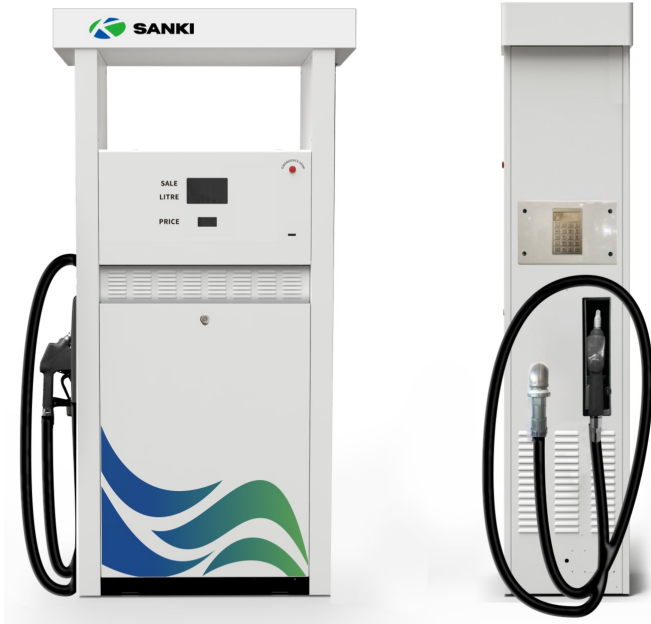

Serie: Classic SK52 – 1/2 hoses

The Classic SK52 series high flow are the narrow H frame single/dual product dispenser in Sanki product family.

Measurement of product*:(mm):

1090*472*2100

Measurement of packaging* (mm):

1150*510*2240

Technical specifications :

Whole Parameter	
Usage scenario	Retail stations
Adaptable Climate	Tropical, marine, cold, dry, humid
Flowrate	110L - 120L/Min
Precision	±0.3%
tandard	OIML(certified by EU laboratory)
Anti-fraud	Lock, seal, electronic password
Ambient temprature	-25℃ ~+55℃ (-45℃ ~+55℃ ,with heater)
Relative humidity	20%-95%
Noise	≤68dB
Acceptable Medium	Diesel;
Hydralics specification	
Flowmeter	0.5L/Cycle, OIML(EU) certified(2 units)
Flowmeter accuracy	±0.25%
Minimum adjustable accuracy	0.05%
Pumping unit	Sanki gear pump or pressure (STP)
Filtering	Dual-filters inside gear pump/Single filter for STP type
Fuel-gas separation capacity	> 15%
Motor	AC220V/380V, ATEX certified
Electronics specification	
Power supply	AC 220V (-15%~+10%); (50/60±1) Hz
Mainboard	Sanki ARM CPU mainboard; 4 layer PCB board manufacturing process
Display	LCD display, independent main & PPU display

Digit of sales	7 digits
Digit of volume	6 digits
Digit of unit price	5 digits
Decimal place	Can be set according to user-defined(0,1,2,3)
Totalizer	ET & EMT
Memory of fueling record	200 pieces per hose
Communication	Port RS485/current loop/LON
Calibration	EC & MC
Peripheral interface capacity	4 product / 8 hose
Program Software Functionality	
Architecture design	Menu type(4 layer)
Parameter query/setup protection	Password protection(layer by layer)
Protocol	Multiple protocol chosen
FCC/POS link	DOMS/Fusion/POSTEC/ITL Enabler/Technotrade/NCR/TOPAZ...
Fault diagnosis	Alarm code
Hanging Hardware	
Diameter of hose	1.25"
Length of hose	Standard 6 meter or as per demand
Diameter of nozzle	1"
Number of nozzles	1, 2
Nozzle brand selection	OPW(pressure/Non-pressure self-sealed), ZYQ
Diameter of breakaway	N/A
Breakaway brand selection	N/A
Diameter of swivel	N/A
Swivel brand selection	N/A
Options	
Fuel management system	Yes
Receipt printer	Yes
IC payment card	Yes
Encrypted pulser/display/software	Yes

Size & Loading quantity:

Model Classic SK52 Series	Suction/ Remote pressure	Overall Dimension (L*W*H)	Packaging Size (L*W*H)	Loading Quantity (20ft)	Loading Quantity (40ft)
SK52GF111B	Suction	1090*472*2100	1150*510*2240	22	46
SK52QF111B	Remote Pressure	1090*472*2100	1150*510*2240	22	46
SK52QF222B	Remote Pressure	1090*472*2100	1150*510*2240	22	46